

WAYNE®

| utility | **SUMP** | sewage | well | lawn | pool | specialty |

submersible sump pump

THERMOPLASTIC WITH PIGGY-BACK TETHER FLOAT SWITCH


- Submersible Thermoplastic Sump Pump with Piggy-Back Tether Float Switch
- Base suction with debris screen
- Corrosion resistant, sealed thermoplastic construction
- Fully submersible
- Max. flow rate is 3060 gallons per hour; 2460 GPH at 10 ft. of discharge lift
- 1-1/2 in. NPT discharge
- For use in 14 in. diameter or larger sump basins; 14 in. ON level and 7 in. OFF level



RSP130

PERFORMANCE

Model	HP	Discharge Head	0'	5'	10'	15'
RSP130	1/3	Gallons/Hour	3060	2820	2460	1500

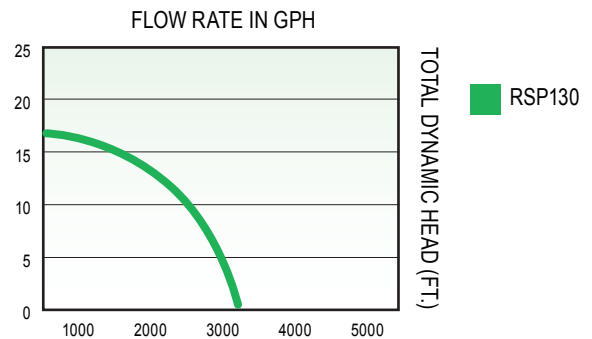

WAYNE®

Customer Service: 1-800-237-0987
Web Site: www.waynepumps.com